


# MiCS<sup>®</sup>

HOSES

QUALITY SOLUTIONS

WWW.MICSHOSES.COM

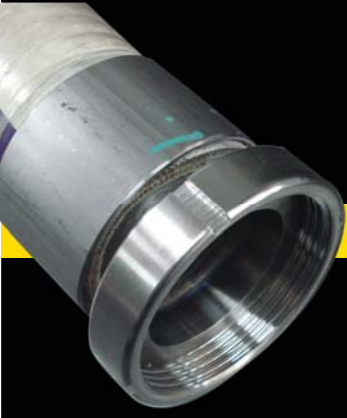

## CRIMPING MACHINERY



MICSHOSES.COM

QUALITY SOLUTIONS

# MiCS



## MICS-S32



Crimping Force: 200 tn.  
 Crimping Range: 10 - 45  
 Control System: Electrical  
 Hydraulic Hose: 1 1/4" 4SP  
 Opening (mm): +24  
 Crimping Speed  
 Seconds: 7  
 Power KW: 2.2  
 L\*W\*H (mm): 450\*550\*850  
 Weight (Kg): 280  
 Die Sets included:  
 15 18 21 24 27 33 39 45



## MICS-S51



Crimping Force: 280 tn.  
 Crimping Range: 10 - 80  
 Control System: Electrical  
 Hydraulic Hose: 2" 4SP  
 Opening (mm): +24  
 Crimping Speed  
 Seconds: 6  
 Power KW: 3  
 L\*W\*H (mm): 450\*550\*950  
 Weight (Kg): 400  
 Die Sets included:  
 15 18 21 24 27 33 39 45 51 57 66



## MICS-S76



Crimping Force: 480 tn.  
 Crimping Range: 10 - 120  
 Control System: Electrical  
 Hydraulic Hose: 3" 4SP  
 Opening (mm): +24  
 Crimping Speed  
 Seconds: 8  
 Power KW: 3  
 L\*W\*H (mm): 450\*650\*1100  
 Weight (Kg): 580  
 Die Sets included:  
 15 18 21 24 27 33 39 45 51 57 66  
 (Optional Die Set To 120)



## MICS-H16HP



Crimping Force: 95 tn.  
 Crimping Range: 10 - 45  
 Control System: Hand Pump  
 Hydraulic Hose: 1"  
 L\*W\*H (mm): 300\*300\*270  
 Weight (ka):  
 Die Sets included:  
 10 12 14 16 19 23 27 31



## MICS-P20



Crimping Force: 140 tn.  
 Crimping Range: 10 - 61  
 Control System: Electrical  
 Hydraulic Hose: 1 1/2" 4SP  
 Opening (mm):  
 Crimping Speed  
 Seconds:  
 Power KW: 3  
 L\*W\*H (mm): 400\*800\*530  
 Weight (Kg): 145  
 Die Sets included:  
 10 12 16 19 23 27 31 36 41 54



## MICS-P32



Crimping Force: 420 tn.  
 Crimping Range: 10 - 87  
 Control System: CNC Precision  
 Control  
 Hydraulic Hose: 2" 4SP  
 Opening (mm): +34  
 Crimping Speed  
 Seconds: 8  
 Power KW: 3  
 L\*W\*H (mm): 525\*515\*546  
 Weight (Kg): 280  
 Die Sets included:  
 15 18 21 24 27 33 39 45 51 57 66



## MICS-P51



Crimping Force: 550 tn.  
 Crimping Range: 10 - 124  
 Control System: CNC Precision Control  
 Hydraulic Hose: 2 1/2" 4SP  
 Industrial Hose: 4"  
 Opening (mm): +46  
 Crimping Speed  
 Seconds: 8  
 Power (KW): 4  
 L\*W\*H (mm): 706\*473\*758  
 Weight (Kg): 480  
 Adapter Die: 99  
 Die Sets Included:  
 15 18 21 24 27 33 39 45 51 57 66  
 optional to 140



## MICS-FP145



Crimping Force (ton): 350  
 Crimping Range: 10 - 140  
 Control System: Full Automatic SIEMENS  
 Precision Digital Control  
 Hydraulic Hose: 2" 6SP  
 Industrial Hose: 4"  
 Opening (mm): +86  
 Crimping Speed (Sec): 6  
 Power (KW): SIEMENS 5.5  
 Adapter Die: 80mm  
 Die Set Rack: Embedded  
 Standard Die Sets: 15 18 21 24 27 33 39 45 51 57 66  
 Quick Chnage System: Included

Control by Pressure: Optional  
 Foot Pedal: Standard  
 Mechanical Back Stop: Optional  
 Servo Back Stop: Optional  
 Two Stage Crimp: Optional  
 Protection Infrared: Optional  
 Acoustic Sensor: Optional (For Insulator Assembly)  
 L\*W\*H (mm): 1063\*1450\*1640  
 Weight (Kg): 1250



## MICS-FP165



Crimping Force (ton): 500  
 Crimping Range: 10 - 202  
 Control System: Full Automatic SIEMENS  
 Precision Digital Control  
 Hydraulic Hose: ALL  
 Industrial Hose: 6"  
 Opening (mm): +125  
 Crimping Speed (Sec): Vary  
 Power (KW): SIEMENS 11  
 Adapter Die: 80mm, 140mm  
 Die Set Rack Embedded  
 Standard Die Sets: 15 18 21 24 27 33 39 45 51 57 66  
 Quick Chnage System: Included

Control by Pressure: Optional  
 Foot Pedal: Standard  
 Mechanical Back Stop: Optional  
 Servo Back Stop: Optional  
 Two Stage Crimp: Optional  
 Protection Infrared: Optional  
 Acoustic Sensor: Optional (For Insulator Assembly)  
 L\*W\*H (mm): 1060\*1750\*1895  
 Weight (Kg): 2850



## MICS-PE175



Crimping Force (ton): 1000  
 Crimping Range: 10 - 320  
 Control System: Full Automatic SIEMENS  
 Precision Digital Control  
 Hydraulic Hose: ALL  
 Industrial Hose: 10"  
 Opening (mm): +150  
 Crimping Speed (Sec): Vary  
 Power (KW): SIEMENS 15  
 Adapter Die: 80mm, 140mm, 202mm  
 Die Set Rack: Embedded  
 Standard Die Sets:  
 15 18 21 24 27 33 39 45 51 57 66

Quick Chnage System: Included  
 Control by Pressure: Optional  
 Foot Pedal: Standard  
 Mechanical Back Stop: Optional  
 Servo Back Stop: Optional  
 Two Stage Crimp: Optional  
 Protection Infrared: Optional  
 Acoustic Sensor: Optional (For Insulator Assembly)  
 L\*W\*H (mm): 1200\*1950\*2100  
 Weight (Kg): 5250

## MICS-C400



Cutting Blade: 400 mm  
 Hydraulic Hose: 2" 4SP  
 Motor KW: 3  
 L\*W\*H (mm): 780\*550\*1100  
 Weight (Kg): 150

## MICS-C520



Cutting Blade: 520 mm  
 Hydraulic Hose: 2" 6SP / 3" 4SP  
 Motor KW: 5.5  
 L\*W\*H (mm): 850\*720\*1200  
 Weight (Kg): 250

## MICS-C300



Cutting Blade: 400 mm  
 Hydraulic Hose: 2" 4SP  
 Motor KW: 3  
 System Power: SIEMENS  
 Control System: Eaton Switch  
 L\*W\*H (mm): 300\*400\*400  
 Weight (Kg): 65

## MICS-SK32



Skiving Methods: Smart  
 Hydraulic Hose: 1 1/4"  
 Skiving Tool: Internal and External  
 Gear Motor KW: 0.37  
 Pneumatic  
 Pusher: Option  
 Simple Setting: Standard  
 Voltage: 220V - 480V /  
 3 Phase,  
 220V Single Phase  
 L\*W\*H (mm): 450\*450\*1250  
 Weight (Kg): 150

## MICS-SK51



Skiving Methods: Smart  
 Hydraulic Hose: 2"  
 Skiving Tool: Internal and External  
 Gear Motor KW: 0.37  
 Pneumatic  
 Pusher: Option  
 Simple Setting: Standard  
 Voltage: 220V - 480V /  
 3 Phase, 220V  
 Single Phase  
 L\*W\*H (mm): 450\*450\*1250  
 Weight (Kg): 195

## **MICS-T100**



Pressure Max (Mpa): 100  
Compressed Air: 0 - 10 Bar  
Control: Manual  
Testing Liquid: Water  
Air Pump: Made in USA  
L\*W\*H (mm): 2050\*830\*1210  
Weight (Kg): 150

## **MICS-T220**



Pressure Max (Mpa): 220  
Compressed Air: 0 - 10 Bar  
Control: SIEMENS Automatic Control  
Testing Liquid: Water  
Air Pump: Germany Imports  
L\*W\*H (mm): 1700\*850\*1250  
Weight (Kg): 350

## **MICS-T440**



Pressure Max (Mpa): 440  
Compressed Air: 0 - 10 Bar  
Control: SIEMENS Automatic Control  
Testing Liquid: Water  
Air Pump: Germany Imports  
L\*W\*H (mm): 1700\*850\*1250  
Weight (Kg): 360