


Adaptadores para conexiones de mangueras

Codo 90° rosca macho UNF asiento JIC 37° a rosca macho BSPT

D0526

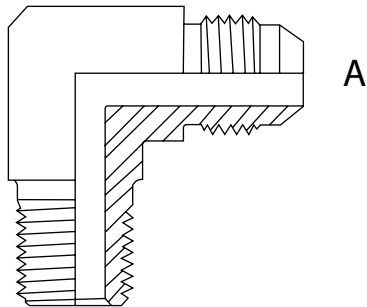

B

Material Hierro Zincado

N° CODIGO	Ø EXTERIOR TURBO	Tamaño de la Rosca	
		A / UNF	B / BSPT
02-02	1/8"	5/16"-24h	1/8"-28h
03-02	3/16"	3/8"-24h	1/8"-28h
04-02	1/4"	7/16"-20h	1/8"-28h
04-04	1/4"	7/16"-20h	1/4"-19h
04-06	1/4"	7/16"-20h	3/8"-19h
05-02	5/16"	1/2"-20h	1/8"-28h
05-04	5/16"	1/2"-20h	1/4"-19h
05-06	5/16"	1/2"-20h	3/8"-19h
06-02	3/8"	9/16"-18h	1/8"-28h
06-04	3/8"	9/16"-18h	1/4"-19h
06-06	3/8"	9/16"-18h	3/8"-19h
06-08	3/8"	9/16"-18h	1/2"-14h
08-04	1/2"	3/4"-16h	1/4"-19h
08-06	1/2"	3/4"-16h	3/8"-19h
08-08	1/2"	3/4"-16h	1/2"-14h
08-12	1/2"	3/4"-16h	3/4"-14h
10-06	5/8"	7/8"-14h	3/8"-19h
10-08	5/8"	7/8"-14h	1/2"-14h
10-12	5/8"	7/8"-14h	3/4"-14h
12-08	3/4"	1 1/16"-12h	1/2"-14h
12-12	3/4"	1 1/16"-12h	3/4"-14h
12-16	3/4"	1 1/16"-12h	1"-11h
14-12	7/8"	1 3/16"-12h	3/4"-14h
16-12	1"	1 5/16"-12h	3/4"-14h
16-16	1"	1 5/16"-12h	1"-11h
16-20	1"	1 5/16"-12h	1 1/4"-11h
20-16	1 1/4"	1 5/8"-12h	1"-11h
20-20	1 1/4"	1 5/8"-12h	1 1/4"-11h
24-24	1 1/2"	1 7/8"-12h	1 1/2"-11h
32-32	2"	2 1/2"-12h	2"-11h

"Poberaj SA se reserva el derecho de modificar las características y medidas de sus productos sin previo aviso".

PENSAMOS EN SEGURIDAD
TRAZABILIDAD



CONSULTE NUESTRAS BASES DE SERVICIOS