


Adaptadores para conexiones de mangueras

Adaptador recto rosca macho UNF asiento JIC 37° a rosca macho UNF Asiento JIC 37°


| D0543 | N° CODIGO | Ø Exterior Tubo | TAMAÑO DE LA ROSCA | |
|-------|-----------|-----------------|--------------------|------------|
| | | | A/JIC | B/JIC |
| | 02-02 | 1/8" | 5/16"-24 | 5/16"-24 |
| | 03-03 | 3/16" | 3/8"-24 | 3/8"-24 |
| | 04-04 | 1/4" | 7/16"-20 | 7/16"-20 |
| | 05-05 | 5/16" | 1/2"-20 | 1/2"-20 |
| | 06-06 | 3/8" | 9/16"-18 | 9/16"-18 |
| | 08-08 | 1/2" | 3/4"-16 | 3/4"-16 |
| | 10-10 | 5/8" | 7/8"-14 | 7/8"-14 |
| | 12-12 | 3/4" | 1 1/16"-12 | 1 1/16"-12 |
| | 14-14 | 7/8" | 1 3/16"-12 | 1 3/16"-12 |
| | 16-16 | 1" | 1 5/16"-12 | 1 5/16"-12 |

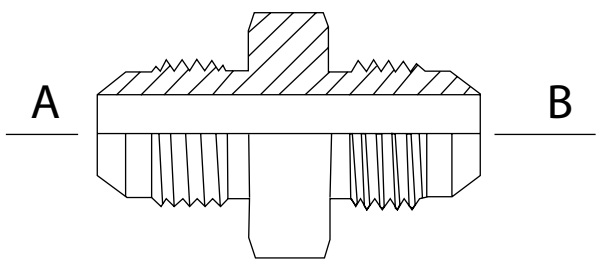

Material Bronce

Codo 90° rosca macho UNF asiento JIC 37° a rosca macho NPTF

| D0544 | N° CODIGO | Ø Exterior Tubo | TAMAÑO DE LA ROSCA | |
|-------|-----------|-----------------|--------------------|-----------|
| | | | A/JIC | B/NPTF |
| | 02-02 | 1/8" | 5/16"-24 | 1/8"-27 |
| | 03-02 | 3/16" | 3/8"-24 | 1/8"-27 |
| | 04-02 | 1/4" | 7/16"-20 | 1/8"-27 |
| | 04-04 | 1/4" | 7/16"-20 | 1/4"-18 |
| | 05-02 | 5/16" | 1/2"-20 | 1/8"-27 |
| | 05-04 | 5/16" | 1/2"-20 | 1/4"-18 |
| | 06-02 | 3/8" | 9/16"-18 | 1/8"-27 |
| | 06-04 | 3/8" | 9/16"-18 | 1/4"-18 |
| | 06-06 | 3/8" | 9/16"-18 | 3/8"-18 |
| | 08-04 | 1/2" | 3/4"-16 | 1/4"-18 |
| | 08-06 | 1/2" | 3/4"-16 | 3/8"-18 |
| | 08-08 | 1/2" | 3/4"-16 | 1/2"-14 |
| | 10-06 | 5/8" | 7/8"-14 | 3/8"-18 |
| | 10-08 | 5/8" | 7/8"-14 | 1/2"-14 |
| | 12-12 | 3/4" | 1 1/16"-12 | 3/4"-14 |
| | 14-12 | 7/8" | 1 3/16"-12 | 3/4"-14 |
| | 16-16 | 1" | 1 5/16"-12 | 1"-11 1/2 |

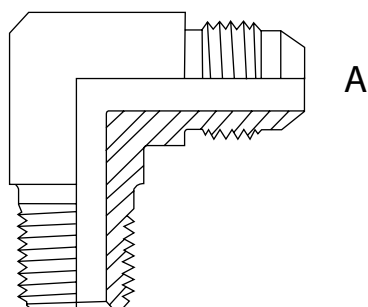

Material Bronce

En forma especial se fabrican también en rosca BSPT

"Poberaj SA se reserva el derecho de modificar las características y medidas de sus productos sin previo aviso".

PENSAMOS EN SEGURIDAD
TRAZABILIDAD



CONSULTE NUESTRAS BASES DE SERVICIOS